







LIGHT







FLEXI FRAME

MODULAR FRAMES FOR AC SPLIT SYSTEMS

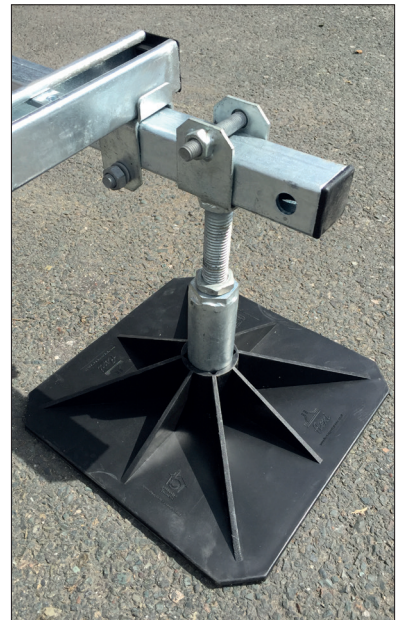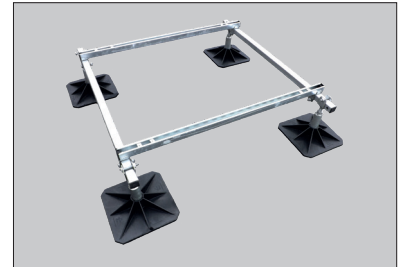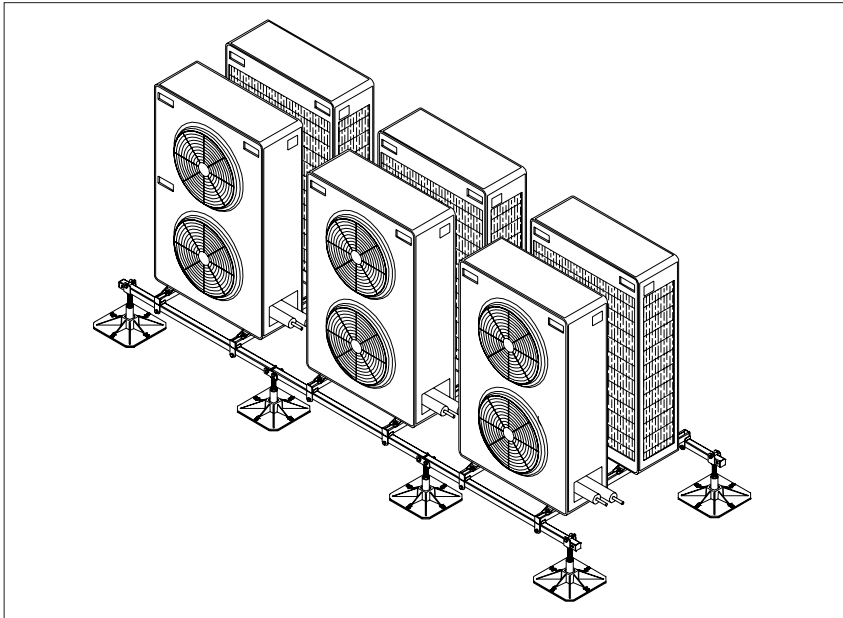

FEATURES & BENEFITS

- Non-penetrative support
- Flexible design to accommodate late design changes
- Fast and simple installation
- Hot-dip galvanised frameworks
- No time consuming clamping kits required, cross bars are industry standard 41 x 41mm strut
- Full AutoCAD drawing support
- Load management and wind calculations available
- Full on-site support and surveying services
- Available as standard 320mm square foot or bespoke 500mm option



FLEXI-LIGHT Flexi Frame for AC Split Systems

The DiversiTech International sales team are available to answer your questions or queries on this product. Our experts are waiting for your call +44 (0)115 900 5858 or if you prefer send an email to sales@flexisupportsystems.co.uk or visit www.flexisupportsystems.co.uk






■ FLEXI FRAME AC SPLIT SYSTEMS

These versatile and free-standing frameworks are supplied boxed and come with fully adjustable leg assemblies with 320mm square black polypropylene feet as standard, incorporating anti-vibration rubber mats adhered to the underside. Robust 40 x 40mm standard box end bars are 3mm thick and leg assemblies can slide to many positions. Industry standard strut cross bars negate the requirements of time consuming clamping kits as sprung washers and associated M10 fixings are supplied with all frameworks. For heavier services please visit our FLEXI-HEAVY range.

Typical AC split condenser layout

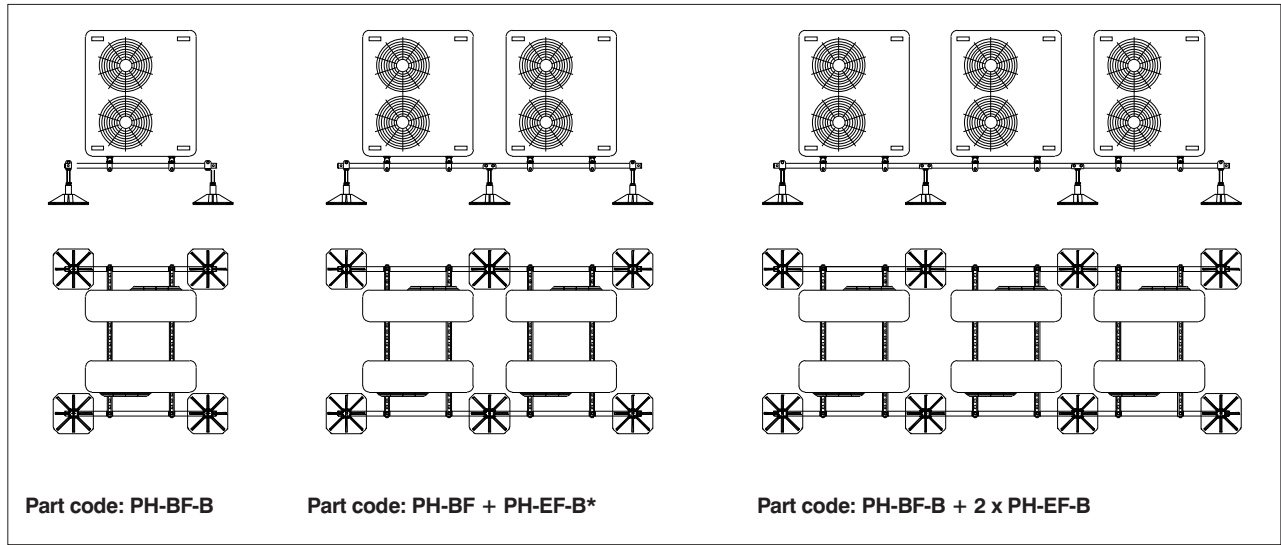

* The system can accommodate any number of AC splits by adding additional PH-EF-B (extender frames)

■ APPLICATION

- Suitable for AC split condensers. Cross bars slide to accommodate AC fixing feet centres and negate the requirement of time consuming clamping kits (as seen with some systems). Industry standard sprung nuts and strut cross bars provide a speedy install.

■ MATERIAL SPECIFICATION

- Foot - 320mm square as standard or 500mm square for bespoke applications UV stabilised 90% polypropylene, 10% grp
- Mat - 100% natural rubber. (mat is adhered to the foot)
- Legs - 48mm dia, 3mm steel tube with M24 stud adjuster and 3mm thick U-clevis to top
- End Bars - 40 x 40 x 3mm SHS (square hollow section)
- Cross Bars - 41 x 41 x 2.5mm slotted strut with adjustable end clamps
- Finish - Hot-dip galvanised steelwork BS EN 10219-1:2006.
- Galvanising: BS EN ISO 1461:2009 Salt mist testing: BS EN IEC 60068-2-52:2018

■ WHAT OUR SERVICE OFFERS YOU

- Quotations on request
- Full Auto-CAD drawing support
- Site support and site surveys
- Load management calculations
- Over 25 years experience in flat roof design, and providing support systems to building services
- Fast delivery
- Experienced in-house technical staff

| Code | Description | Length | Width | Min. height | Max. height | Safe working load | Weight |
|---------|----------------------|--------|--------|-------------|-------------|-------------------|--------|
| PH-BF-B | Flexi Base Frame | 1200mm | 1200mm | 300mm | 405mm | 500kg | 30kg |
| PH-EF-B | Flexi Extender Frame | 1200mm | 1200mm | 300mm | 405mm | 500kg | 24kg |

Specification Extract

External AC services will be supported on the DiversiTech fully adjustable and hot-dip galvanised Flexi Frames.
Tel: +44(0)115900 5858

FLEXI-LIGHT Flexi Frame for AC Split Systems

The DiversiTech International sales team are available to answer your questions or queries on this product. Our experts are waiting for your call +44 (0)115 900 5858 or if you prefer send an email to sales@flexisupportsystems.co.uk or visit www.flexisupportsystems.co.uk

