




■ PVC COATED EXTERNAL GRADE INSULATION

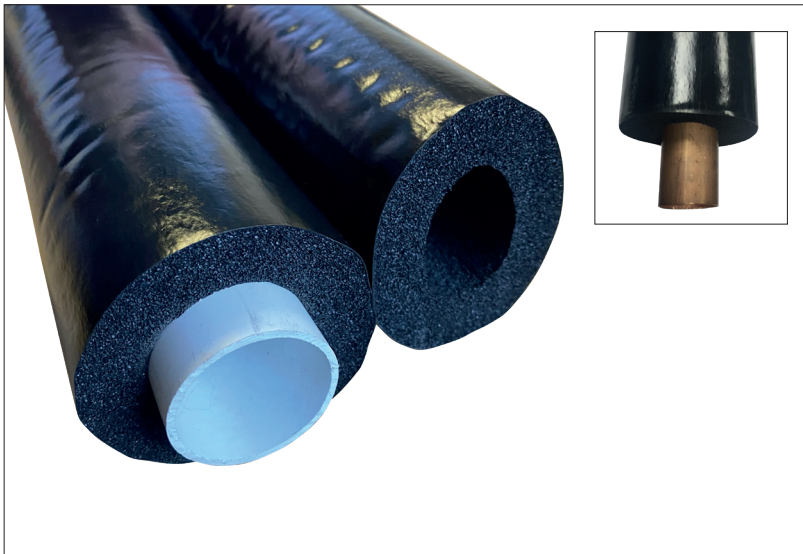

External condensate pipework needs to be insulated in a tough PVC coated weather protected covering to avoid UV degradation and animal damage.

Boiler installation standard BS 6798:2014 makes specific reference to this grade of insulation.

ASHP and Biomass Boilers tend to be located externally and this hot water pipework needs to be protected and insulated to avoid heat loss, MIS3005 and building regulations advise a certain thickness of insulation to meet heat loss requirements.

Our PVC coated range helps installations comply in both boiler condensate and ASHP installations.

■ FEATURES

- Up to 19mm thick PVC coated insulation
- Suitable for ASHP & biomass boilers
- Compatible with 28mm / 32mm compression fitting
- Suitable for external boiler condensate pipe to help with BS-6798 compliance

■ THE PACKAGE

- 2 metre length of insulation

■ RELATED PRODUCTS

- Flexi Lite Slab and Foot Kit
- Trunking
- Through Wall Insulation Kit
- Flexible hose
- Boiler condensate pumps
- Soak Away

Part code	Description	Length*	Diameter	Thickness	ID
FH-I-1000-15	PVC Coated Weather and Waterproof Insulation 1000mm	1000mm	41mm	13mm	15mm
FH-I-1000-22	PVC Coated Weather and Waterproof Insulation 1000mm	1000mm	60mm	19mm	22mm
FH-I-1000-28	PVC Coated Weather and Waterproof Insulation 1000mm	1000mm	66mm	19mm	28mm
FH-I-1000-35	PVC Coated Weather and Waterproof Insulation 1000mm	1000mm	73mm	19mm	35mm

*Minimum order quantity is 2000mm or 2m lengths

Part code	Description	Length	Width	Thickness
INS-TAPE-10-PK	PVC Coated Weather and Waterproof Insulation Tape 10 pack	250mm	50mm	1mm

INSULATION PVC COATED EXTERNAL GRADE INSULATION

The DiversiTech International sales team are available to answer your questions or queries on this product. Our experts are waiting for your call +44 (0)115 900 5858 or if you prefer send an email to sales@diversitech.com or visit www.diversitech.global



Glaisdale Drive East
Nottingham NG8 4LY
United Kingdom