




DE-05-FD - MINI SPLIT PUMP IN TRUNKING

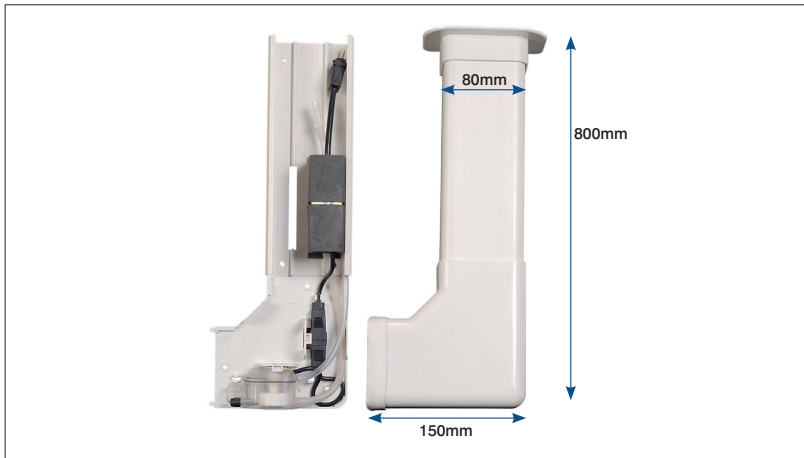


Flowatch Design®

An easy to install mini pump with trunking. Just one 90 degree bend is required to secure the pipes within the elbow. Ideal for mini split air conditioning.

Rubber mounted pump to reduce vibration and noise.

FEATURES

- Quiet – low decibel rating of <21dB(A)
- Attractive – smooth clean white trunking to match most wall-mounted systems
- Spacious – ample room for 3/8" and 5/8" copper pipes
- Proven pump reliability with 15 years of sales in the global market
- Replacement pump and parts available

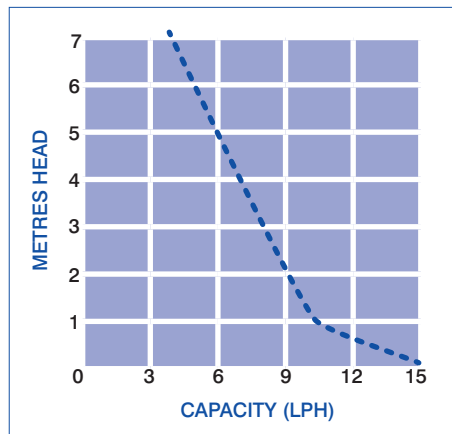

THE PACKAGE

- Mini FLOWATCH® condensate pump with detection unit
- 80mm x 800mm duct
- Fixing plate (reversible left or right) and elbow cover
- Ceiling rosette
- Complete fixing accessories

RELATED PRODUCTS

- Braided hose
- Squeezy Fit - TRH / FRC
- S&V adaptor



MAX. FLOW 15 LPH



DECIBEL RATING 21 dB(A)

IP	Voltage	Power	Amps	Flow	Outlet	Weight
64	240V	19W	0.1A	15 LPH	1/4"	1.6kg

Part code	Max. lift	Suction lift	Outlet hose	High level alarm	Duct dimensions (L)	Duct dimensions (W)
DE-05-FD	10m*	2m	6mm	240V / 8A	800mm	80mm

* We recommend using this pump at no greater than 10m head.

PUMPS DE-05-FD

Mini split pump in trunking

The DiversiTech International sales team are available to answer your questions or queries on this product. Our experts are waiting for your call +44 (0)115 900 5858 or if you prefer send an email to sales@diversitech.com or visit www.diversitech.global



Glaisdale Drive East
Nottingham NG8 4LY
United Kingdom