




## PH-20-STA - 2 LITRE BOILER CONDENSATE PUMP




The 5.5 metre discharge lift helps with the flexibility of the installation. Suitable for both floor and wall mounting and comes with a quick release check valve. Suitable for boilers up to 200kW this version comes with 6 metres of 9.5mm (3/8") ID flexible drain hose.

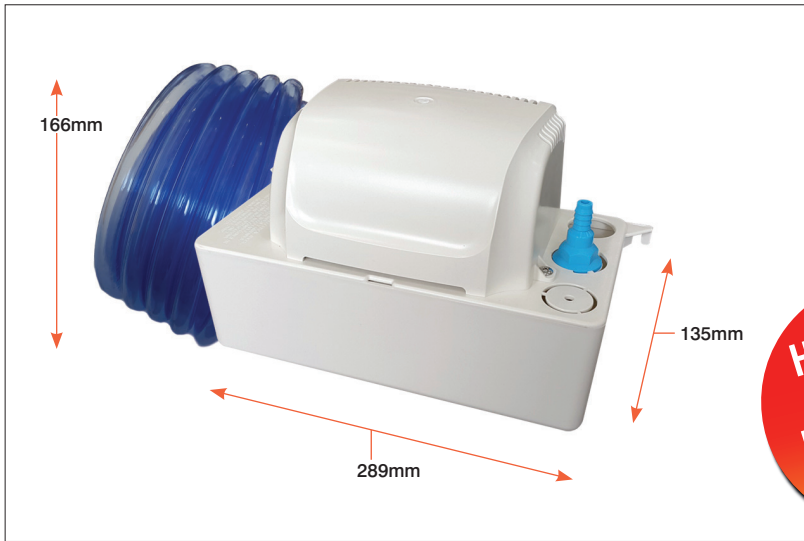

### FEATURES

- 650ml drink cycle at 8.5psi
- Typically 30 seconds run time 3-5 times per day
- Outlet 9.5mm (3/8")
- Suitable for 2.8pH boiler condensate
- 6 metres of 9.5mm (3/8") ID flexible hose
- High-level safety switch
- Suitable for boilers up to 200kW

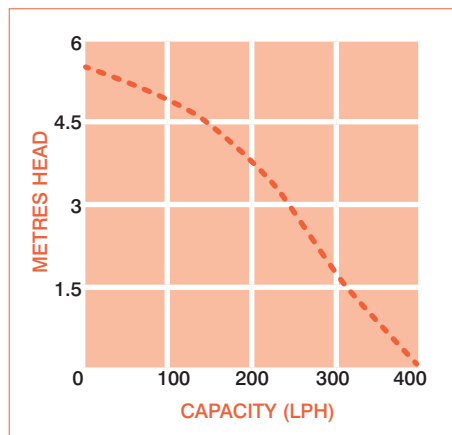

### THE PACKAGE

- 2 litre tank pump
- Quick release 1/4 turn check valve
- 6m of 9.5mm (3/8") hose
- 9.5mm to 22mm adaptor
- Hose clip
- Installation instructions



**MAX. FLOW** 402 LPH



**TANK CAP.** 1.8L



**DECIBEL RATING** 43 dB(A)

Part code	Max. lift	Discharge size	Watts	IP	Amps	Volts	Hz
PH-20-STA	5.5m	9.5mm (3/8")	117W	20	1.6A	240V	50Hz

High level alarm	Inlet height	Weight	Cable length	Drink cycle	On level	Off level	Reserve before overflow	Alarm level
Volt free	82.5mm	1.9kg	1.8mm	650ml	30mm	9mm	580ml	50mm

## PUMPS PH-20-STA

2 Litre Boiler Condensate Pump

The DiversiTech International sales team are available to answer your questions or queries on this product. Our experts are waiting for your call +44 (0)115 900 5858 or if you prefer send an email to [sales@diversitech.com](mailto:sales@diversitech.com) or visit [www.diversitech.global](http://www.diversitech.global)



Glaisdale Drive East  
Nottingham NG8 4LY  
United Kingdom